

Technical sheet No 125GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Eye-hook EC turnbuckle**

3. Description and use: Cast eye-hook turnbuckle with standard metric right-hand and left-hand thread, for use as tensioning device in general applications. For use within technical parameters given in point 5.

4. Do not overload over WLL (kG) given in column 13.

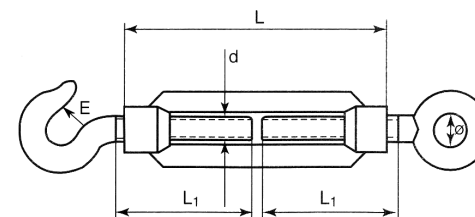

5. Technical parameters:

No	Size (d)	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		L [mm]	L1 [mm]	E [mm]	Ø [mm]	---	---	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	M5	80	40	6	8,5	---	---	---	---	---	0,034	40	120	Body: malleable Termination: C10~C15	Electro-galvanized
2	M6	90	40	8,5	9,5	---	---	---	---	---	0,051	50	150		
3	M8	110	55	10	10,5	---	---	---	---	---	0,102	100	300		
4	M10	130	60	13	13	---	---	---	---	---	0,175	160	480		
5	M12	140	70	16,5	16	---	---	---	---	---	0,336	230	690		

6. Additional informations:

- Safety factor - 3
- BF = 3,0 x WLL
- Markings: size code
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.