

Technical sheet No 77GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czehów, tel/fax 014 6635260**

2. Product name: **GM-LO-G8 Lashing element EN 12195-3**

3. Description and use: lashing element consist of: EN 818-2 grade 8 or 10 lifting chain, with two EN 1677-2 clevis slip hooks mounted on the ends of the chain. Lashing elements are designed for the safe surface transport of goods on load carriers, e.g. trucks and trailers which are used on roads or located on vessels or on rail wagons and/or combinations thereof. For use within technical parameters given in point 5 and Directive 2001/95/EC of the European Parliament and of the Council of 3.12.2001 on general product safety.

4. Storage, installation and usage - according to instruction manual / control card of lashing element

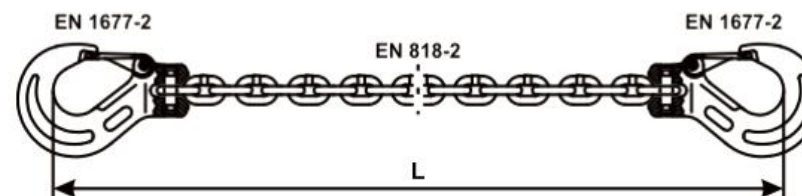

5. Technical parameters:

No	Size [mm]	Length [L]	LC Lashing capacity [kN]	MPF Proof force [kN]	BF Breaking force [min. kN]	Material	Coatings
1	2	3	4	5	6	7	8
1	8	As ordered	40	50	80,4	Conform with EN 12195-3	Paint
2	10	As ordered	63	78,8	126		
3	13	As ordered	100	125	212		

6. Additional informations:

- Safety factor: 2
- MPF=1,25 x LC, BF =2,0 x LC
- Manufacturer and product identification code: GM-LO-G8
- Traceability code: unique serial number marked on the tag
- Markings: tag attached to chain: norm no - EN 12195-3 ; manufacturer logo; LC... kN ; S_{TF} ...daN; manufacturer and product identification code; Traceability code; warning „Not for lifting”
- Additional informations – label: product name; size; LC (kN); length (m); quantity; serial number; manufacturer's data and website address