

Technical sheet No 27GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **GM-O-G8 Lashing chain EN 12195-3**

3. Description and use: lashing chains consist of two basic elements: type C3 EN 12195-3 ratchet type load binder and EN 818-2 grade 8 or 10 lifting chain, with two EN 1677-2 clevis slip hooks mounted on the ends of the chain. Lashing chains are designed for the safe surface transport of goods on load carriers, e.g. trucks and trailers which are used on roads or located on vessels or on rail wagons and/or combinations thereof. For use within technical parameters given in point 5 and Directive 2001/95/EC of the European Parliament and of the Council of 3.12.2001 on general product safety.

4. Storage, installation and usage - according to instruction manual / control card of lashing chain

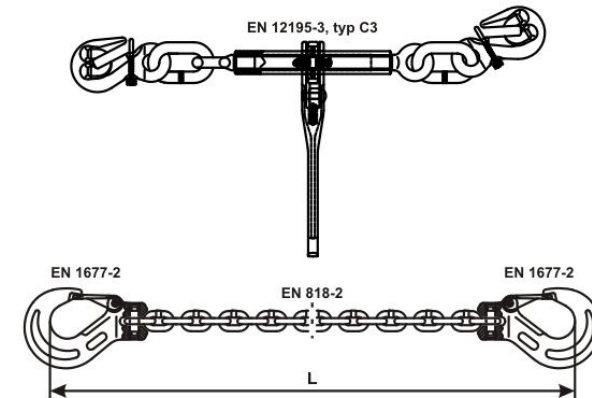

5. Technical parameters:

No	Size [mm]	Length [L]	LC Lashing capacity [kN]	MPF Proof force [kN]	BF Breaking force [min. kN]	Material	Coatings
1	2	3	4	5	6	7	8
1	8	As ordered	40	50	80,4	Conform with EN 12195-3	Paint
2	10	As ordered	63	78,8	126		
3	13	As ordered	100	125	212		

6. Additional informations:

- Safety factor: 2
- MPF=1,25 x LC, BF =2,0 x LC
- Manufacturer and product identification code: GM-O-G8
- Traceability code: unique serial number marked on the tag's
- Markings: tag attached to chain and to load binder: norm no - EN 12195-3 ; manufacturer logo; LC... kN ; S_{TF} ...daN; manufacturer and product identification code; Traceability code; warning „Not for lifting”
- Additional informations – label: product name; size; LC (kN); length (m); quantity; serial number; manufacturer's data and website address