

Technical sheet No 71GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **LZ8 Grade 8 square skidding chain**

3. Description and use: Grade 8 "D" shaped electric welded and tempered chains – 800 N/ mm² (MPa) designed for skidding, also for use in agriculture, forestry and the other general applications. For use within technical parameters given in point 5.

4. Skidding chains cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Shall be used with grade 8 skidding accessories. Do not overload over LC (kN) given in column 7.

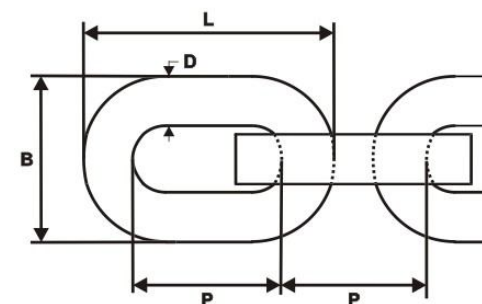

5. Technical parameters:

No	Size D [mm]	Nominal dimensions [mm]			Weight [kg/m]	LC Lashing capacity [kN]	BF Breaking force [min. kN]	Material	Coatings	A _z [%]
		L	P	B						
1	2	3	4	5	6	7	8	9	10	11
1	8	44,5	28	29	1,549	45	90	Grade 8 alloy steel	Galvanization and paint or paint	15

6. Informacje dodatkowe:

- Safety factor -2
- BF = 2,0 x LC
- Manufacturer and product identification code: LZ8
- Traceability code: a four-digit number by formula - YYMM (YY = year of production , MM = month of production)
- Markings (every 18-th link or every 1 meter): **8** ; **GM** or **GMG**; traceability code
- Additional informations – label and tag: product name; size; LC...kN; quantity; order No; manufacturer's data and website address.