

## Technical sheet No 35GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Simplex hook**

3. Description and use: Simplex hook for use in agriculture as chain accessory, and the other general applications. For use within technical parameters given in point 5.

4. Simplex hooks cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Do not overload over WLL (kG) given in column 14.

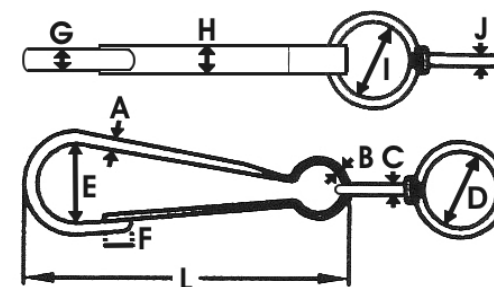

5. Technical parameters:

No	Size L [mm]	Nominal dimensions [mm]										Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J [mm]					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
1	<b>30</b>	1,6	0,9	2	10	7	2,6	2,9	4	7,5	1,5	0,004	3	6	C5~C10	Electro-galvanized
2	<b>40</b>	1,9	1	2,4	11,5	8,6	3,6	4	5,4	9,1	2	0,007	5	10		
3	<b>50</b>	2,4	1,2	2,5	13,5	10,3	6,4	5	6,5	11	2,2	0,013	10	20		
4	<b>60</b>	3,3	1,5	3,6	15,5	12,3	7,2	5,6	7,6	12,5	2,3	0,023	15	30		
5	<b>70</b>	3,3	1,6	3,4	15,2	13	10	7,2	9,5	11,7	2,4	0,030	20	40		
6	<b>80</b>	3,7	1,7	4	18,2	15,5	8,7	7,9	10,3	15,4	3	0,044	25	50		
7	<b>90</b>	4,1	1,9	4	22	17,5	10,2	8,1	10,4	18	3,4	0,061	30	60		
8	<b>100</b>	4,7	2,2	4	18,5	18	11	9,7	12,4	19	3,9	0,079	35	70		
9	<b>120</b>	5,5	2,6	4,7	19,5	19,5	13	11	13	20	4,6	0,129	40	80		

6. Additional informations:

- Safety factor - 2
- BF = 2,0 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.