

Technical sheet No 139GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **DIN1480 hook+hook turnbuckle**

3. Description and use: Forged hook+hook turnbuckle with standard metric right-hand and left-hand thread, for use as tensioning device in general applications. For use within technical parameters given in point 5.

4. Do not overload over WLL (kG) given in column 13.

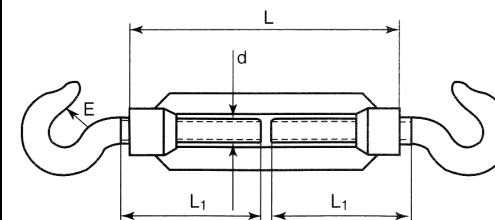

5. Technical parameters:

No	Size (d)	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		L [mm]	L1 [mm]	E [mm]	---	---	---	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	M14	140	80	14,5	---	---	---	---	---	---	0,614	370	1110	C10 ~ C15	Electro-galvanized
2	M16	170	90	17	---	---	---	---	---	---	0,952	500	1500		
3	M20	200	100	19	---	---	---	---	---	---	1,673	750	2250		
4	M24	255	140	26	---	---	---	---	---	---	2,865	1100	3300		

6. Additional informations:

- Safety factor - 3
- BF ≈ 3,0 x WLL
- Markings: manufacturer's symbol - GMG; size code; marking of side of left-hand thread - L
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.