

Technical sheet No 34GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **Spring hook**

3. Description and use: Spring hook for use in agriculture as chain accessory, and the other general applications. For use within technical parameters given in point 5.

4. Spring hooks cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Do not overload over WLL (kG) given in column 13.

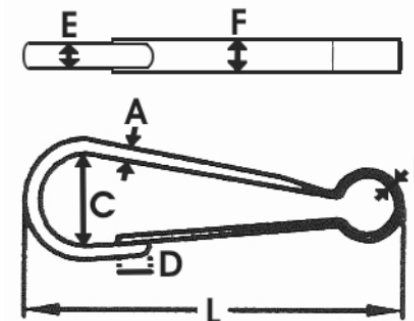

5. Technical parameters:

No	Size L [mm]	Nominal dimensions [mm]									Weight [kg/pc]	WLL Working load [kG]	BF Breaking force [min. kG]	Material	Coatings
		A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	---	---	---					
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
1	30	1,6	0,9	7	2,6	2,9	4	---	---	---	0,002	3	6	C5-C10	Electro-galvanized
2	40	1,9	1	8,6	3,6	4	5,4	---	---	---	0,004	5	10		
3	50	2,4	1,2	10,3	6,4	5	6,5	---	---	---	0,009	10	20		
4	60	3,3	1,5	12,3	7,2	5,6	7,6	---	---	---	0,015	15	30		
5	70	3,3	1,6	13	10	7,2	9,5	---	---	---	0,021	20	40		
6	80	3,7	1,7	15,5	8,7	7,9	10,3	---	---	---	0,030	25	50		
7	90	4,1	1,9	17,5	10,2	8,1	10,4	---	---	---	0,043	30	60		
8	100	4,7	2,2	18	11	9,7	12,4	---	---	---	0,060	35	70		
9	120	5,5	2,6	19,5	13	11	13	---	---	---	0,097	40	80		

6. Additional informations:

- Safety factor - 2
- BF = 2,0 x WLL
- Additional informations – label: product name; size; quantity; order No; manufacturer's data and website address.