

Technical sheet No 67GM/KAR


1. Supplier name: **GÓRALMET Sp. z o.o.**

Supplier address: **ul. Krakowska 68, 32-860 Czchów, tel/fax 014 6635260**

2. Product name: **LZ10 Grade 10 square skidding chain**

3. Description and use: Grade 10 "D" shaped electric welded and tempered chains – 1000 N/ mm² (MPa) designed for skidding, also for use in agriculture, forestry and the other general applications. For use within technical parameters given in point 5.

4. Skidding chains cannot be used in the applications that has safety requirements regulated by law or standards, for example for lifting. Shall be used with grade 10 skidding accessories. Do not overload over LC (kN) given in column 7.

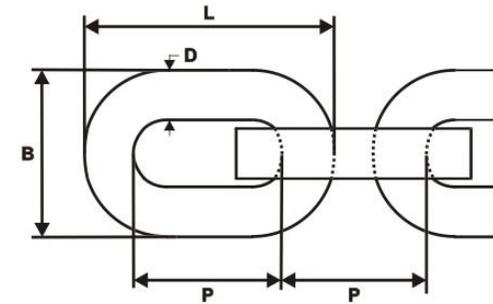

5. Technical parameters:

No	Size D [mm]	Nominal dimensions [mm]			Weight [kg/m]	LC Lashing capacity [kN]	BF Breaking force [min. kN]	Material	Coatings	A _z [%]
		L	P	B						
1	2	3	4	5	6	7	8	9	10	11
1	7 (7,5±0,1)	39	24	25	1,343	45	90	Grade 10 alloy steel	Galvanization or paint	15
2	8 (8,5±0,1)	45	28	29	1,690	60	120			

6. Informacje dodatkowe:

- Safety factor -2
- BF = 2,0 x LC
- Manufacturer and product identification code: LZ10
- Traceability code: a four-digit number by formula - YYMM (YY = year of production , MM = month of production)
- Markings (every 20-th link or every 1 meter): **10** ; **GM** or **GMG**; traceability code
- Additional informations – label and tag: product name; size; LC...kN; quantity; order No; manufacturer's data and website address.